



Tire Pressure Monitoring System Rear Antenna (86.53.17)

Removal

1. Remove the fender moulding. For additional information, refer to [Rear Quarter Panel Moulding \(76.43.55\)](#) (Section 501-08)
2. Remove the fender splash shield.
 - ▶ Remove the 2 screws.
 - ▶ Remove the 6 retainers.
 - ▶ Disconnect the electrical connector.

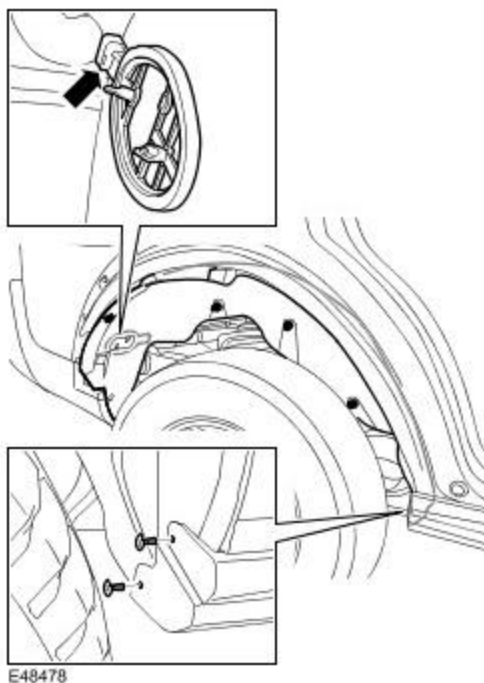

3. Remove the tire pressure antenna.
 - ▶ Remove the 2 retainers.

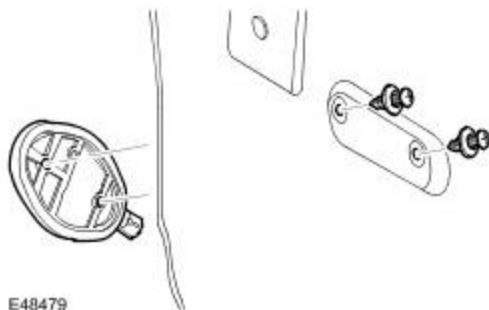

Installation

1. To install, reverse the removal procedure.

- 2 . Initiate a new tire pressure antenna using T4.