


Published: Oct 13, 2004


## Brake Pedal and Bracket - Vehicles With: Automatic Transmission (70.35.03)

### Removal


1. Remove the headlamp switch. For additional information, refer to [Headlamp Switch \(86.65.09\)](#) (Section 417 -01)
2. Remove the stoplamp switch. For additional information, refer to [Stoplamp Switch \(70.35.42\)](#) (Section 417 -01)
3. Remove the instrument panel access panel.
  - ▶ Release the 2 clips.

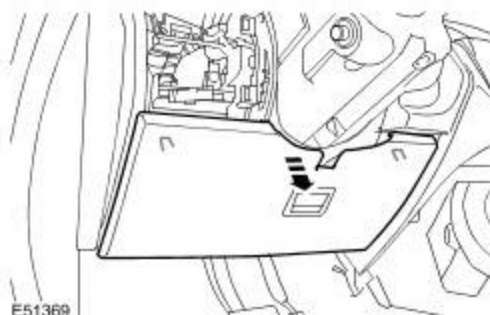

4. Remove the brake pedal bracket.
  - ▶ Release the wiring harness clip.
  - ▶ Remove the 4 Torx bolts.

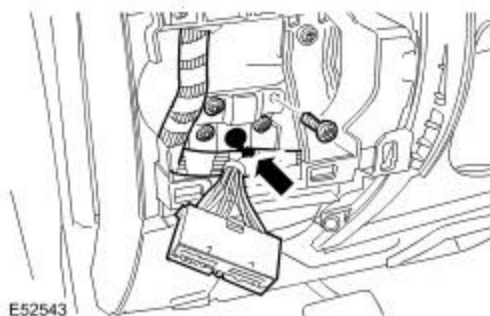


5. Remove the brake pedal clevis pin.
  - ▶ Remove the clip.

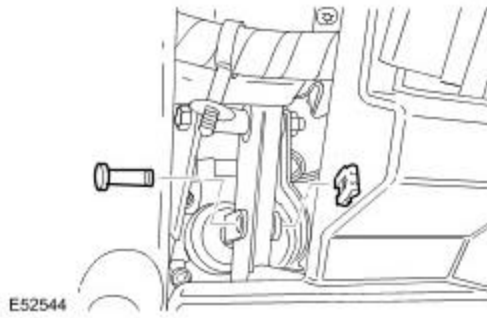

6. Release the stoplamp wiring harness.


➤ Release the 2 clips.

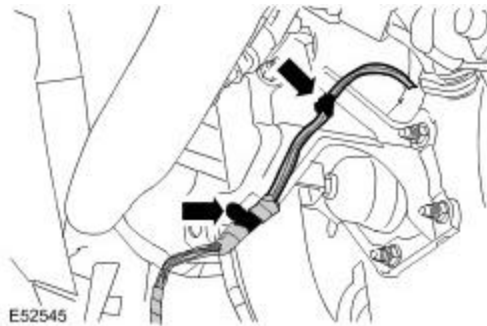

7. Remove the brake pedal assembly.


➤ Remove the 6 nuts.

➤ Position the brake booster forward to aid the removal of the brake pedal assembly.

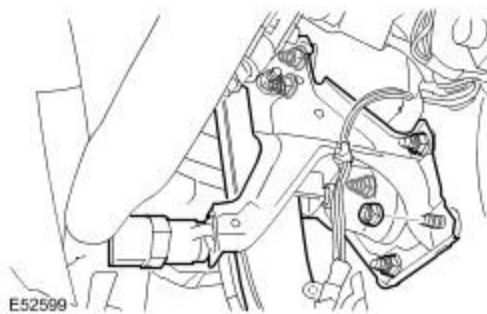



## Installation

1. Install the brake pedal assembly.
  - Position the brake booster to the brake pedal bracket.
  - Tighten the nuts to 25 Nm (18 lb.ft).
2. Secure the wiring harness.
  - Secure the clips.
3. Install the brake pedal clevis pin.


 Install the clip.

4 . Install the brake pedal bracket.

 Tighten the Torx bolt to 10 Nm (7 lb.ft).

 Secure the wiring harness.

5 . Install the instrument panel access panel.

 Secure with the clips.

6 . Install the stoplamp switch. For additional information, refer to [Stoplamp Switch \(70.35.42\)](#) (Section 417-01)

7 . Install the headlamp switch. For additional information, refer to [Headlamp Switch \(86.65.09\)](#) (Section 417-01)