





## Driver Side Register Trim Panel (76.46.12)

### Removal


1. Remove the driver side register trim panel.
  - ▶ Release the 2 clips.
  - ▶ Disconnect the electrical connector.

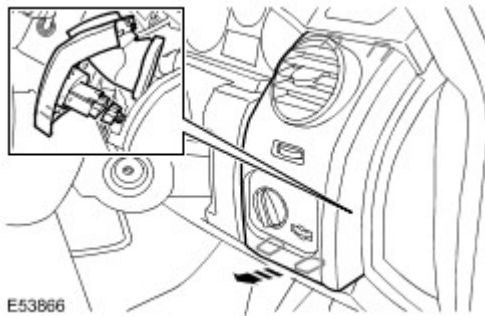



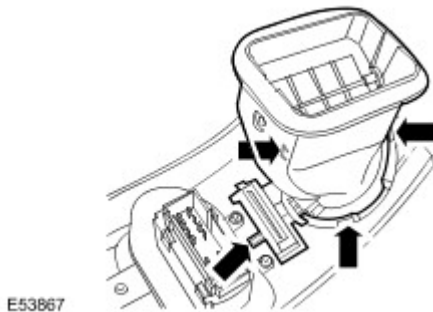

2. **NOTE :**  
Do not disassemble further if the component is removed for access only.  
Remove the register.
  - ▶ Release the 4 clips.



3. Remove the headlamp switch.
  - ▶ Remove the 4 Torx screws.



### Installation

- 1 .        Install the headlamp switch.
  -  Tighten the Torx screws.
- 2 .        Install the register.
  -  Secure with the clips.
- 3 .        Install the driver side register trim panel.
  -  Connect the electrical connector.
  -  Secure with the clips.