


Audio Unit (86.50.81)

Removal




CAUTION: A new audio unit is supplied with a transit plate installed. The transit plate must be removed, before installing the audio unit.

1. Remove the instrument panel console. For additional information, refer to [Instrument Panel Console \(76.25.03\)](#) (Section 501-12 Instrument Panel and Console)
2. Release the climate control assembly.
 - ▶ Remove the 4 Torx screws.

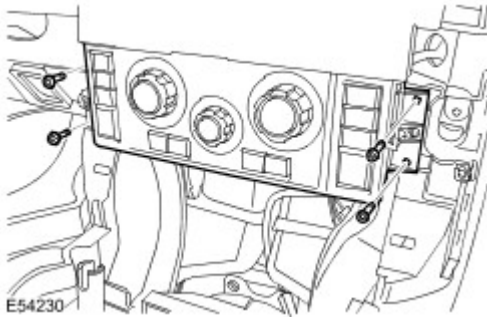

3. Remove the audio unit.
 - ▶ Remove the 4 Torx screws.
 - ▶ Disconnect the 2 electrical connectors.
 - ▶ Disconnect the antenna cable.

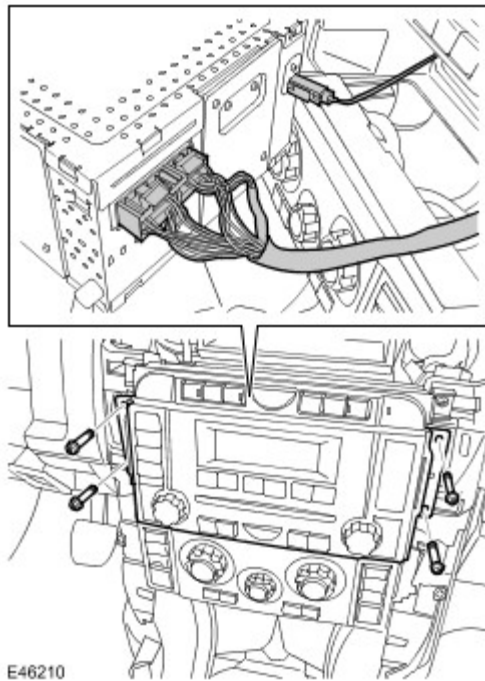

Installation

1 .



CAUTION: A new audio unit is supplied with a transit plate installed. This transit plate must be removed, before installing the audio unit.

Install the audio unit.

- Attach the antenna cable.
- Connect the electrical connectors.
- Tighten the Torx screws.

2 .

Install the climate control assembly.

- Tighten the Torx screws.

3 .

Install the instrument panel console. For additional information, refer to [Instrument Panel Console \(76.25.03\)](#) (Section 501-12 Instrument Panel and Console)

4 .

Using T4, configure a new audio unit.