


Published : Feb 4, 2005

Anti-Theft Alarm Horn with Integral Battery

Removal

1. Remove the auxiliary battery box cover.


▶ Release the 2 clips.

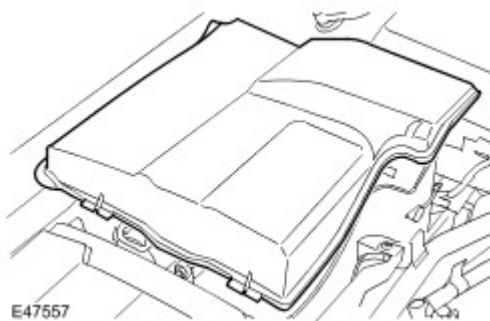

2. Remove the anti-theft alarm horn.

▶ Disconnect the electrical connector.

▶ Remove the 2 bolts.

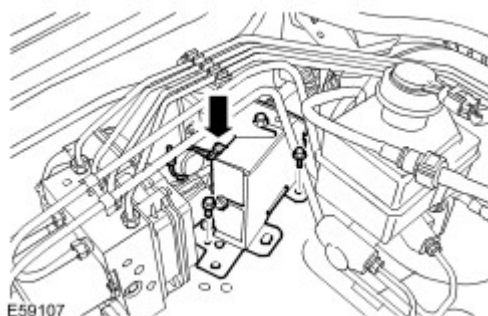

Installation

1. Install the anti-theft alarm horn.
 - ▶ Tighten the bolts to 10 Nm (7 lb.ft).
 - ▶ Connect the electrical connector.
2. Install the auxiliary battery box cover.