


Published : Jun 16, 2004


C-Pillar Upper Trim Panel (76.13.35)

Removal

- 1 . Fold down the rear seat backrest.
- 2 . Release the door aperture weatherstrip.
- 3 . Release the safety belt lower anchor.
 - Remove and discard the Torx bolt.
- 4 . Release the upper trim access cover.
- 5 . Remove the C-pillar upper trim panel.
 - Remove and discard the Torx screw.
 - Release the 4 clips.
 - Release the safety belt from the seat.

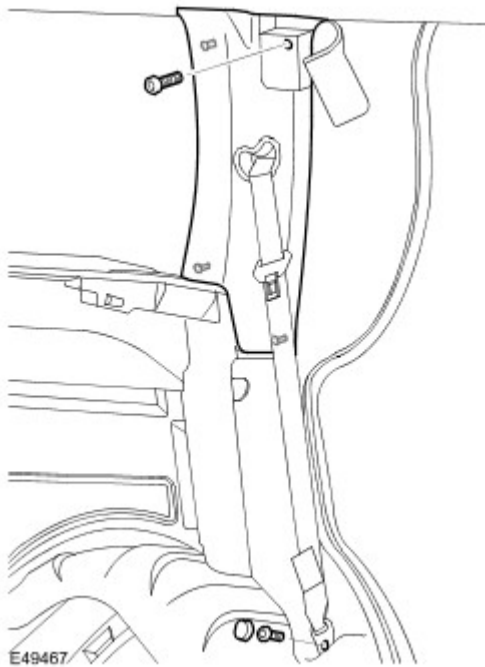

- 6 . **NOTE :**
 - Do not disassemble further if the component is removed for access only.
 - Remove the 4 clips from the C-pillar upper trim panel.

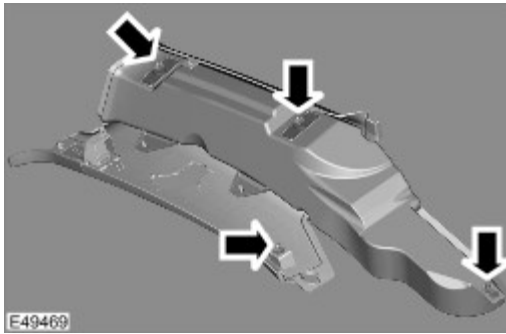

Installation

- 1 . Install the clips to the C-pillar upper trim panel.
- 2 . Install the C-pillar upper trim panel.
 - ▶ Attach the safety belt.
 - ▶ Secure with the clips.
 - ▶ Install a new Torx screw and tighten to 3 Nm (2 lb.ft).
- 3 . Install the upper trim access cover.
- 4 . Install the safety belt lower anchor.
 - ▶ Tighten the new Torx bolt to 40 Nm (30 lb.ft).
- 5 . Install the door aperture weatherstrip.
- 6 . Return the seat backrest to the upright position.