

BOLT INSPECTION


A6E242410135E01

1. Measure the length of each bolt.

- Replace any that exceeds maximum length.

Length L

bolt	Standard (mm) {in}	Maximum (mm) {in}
Cylinder head bolt	149.0-150 {5.86-5.90}	150.5 {5.92}
Connecting rod bolt	44.7-45.3 {1.75-1.78}	46.0 {1.81}
Main bearing cap bolt	110.0-110.6 {4.33-4.35}	111.3 {4.38}

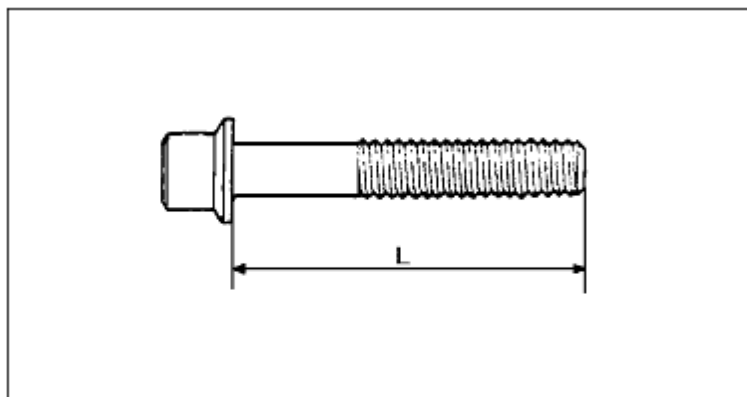

AME2224E050