


AFTER REPAIR PROCEDURE [LF]

B3E010200102W09

1. Connect the WDS or equivalent to the DLC-2.

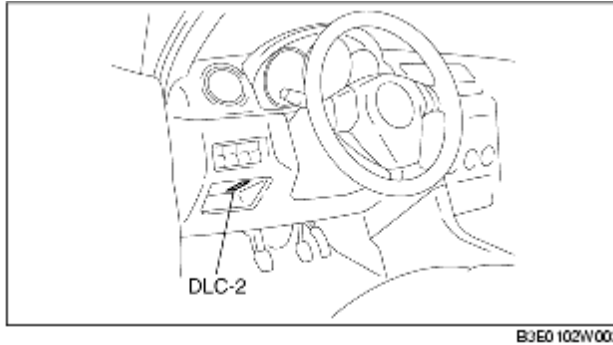

2. Cycle the ignition switch off, then to the ON position (Engine off).
3. Record the DTC if retrieved.
4. Clear all diagnostic data using the WDS or equivalent.