


AFTER REPAIR PROCEDURE [ZJ, Z6]

B3E010200102W20

1. Connect the WDS or equivalent to the DLC-2.

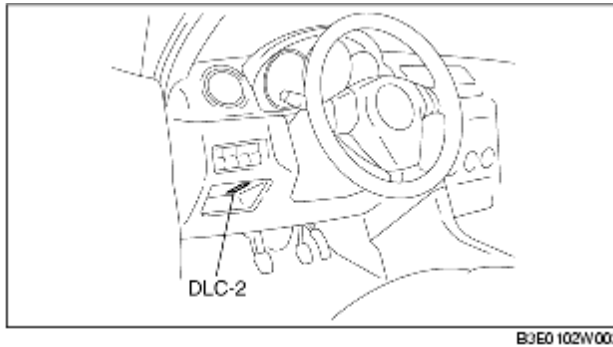

2. Cycle the ignition switch off, then to the ON position (Engine off).
3. Record DTC if retrieved.
4. Clear all diagnostic data using the WDS or equivalent.