

BATTERY RECHARGING

B3E011718520W04


Warning

- Keep all flames away from the battery, otherwise evaporated gas from the battery fluid may catch fire, and cause serious injury.
- Remove the battery filler caps when recharging to prevent battery deformation or damage.

Caution

- Do not quick charge for over 30 min. It will damage the battery.

1. Remove the battery and then place it in a pan of water.

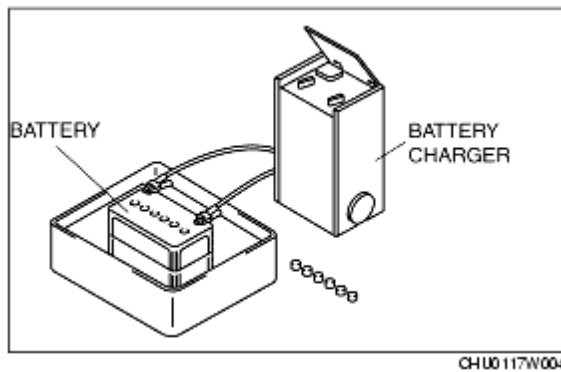

2. Connect a battery charger to the battery and adjust the charging current as follows.

Standard specification

Battery type (5-h rate)	Recharge current (A)	Quick charge (A/30 min)
50D20L (40)	4.0-5.0	25
75D26L (52)	5.0-6.0	35
80D26L (55)	5.5-6.5	35

3. After the battery is recharged, verify that the voltage is within the specification and remains at the same value for **1 h or more** after the recharging was completed.

- If not within the specification, replace the battery.

Standard voltage
12.4 V or more