


FRONT CROSSMEMBER CONSTRUCTION

B3E021334800T01

- A four-point rubber mount system has been adopted for the front crossmember. Due to this high handling stability and low NVH (Noise, Vibration, Harshness) are provided without a loss in mount rigidity.

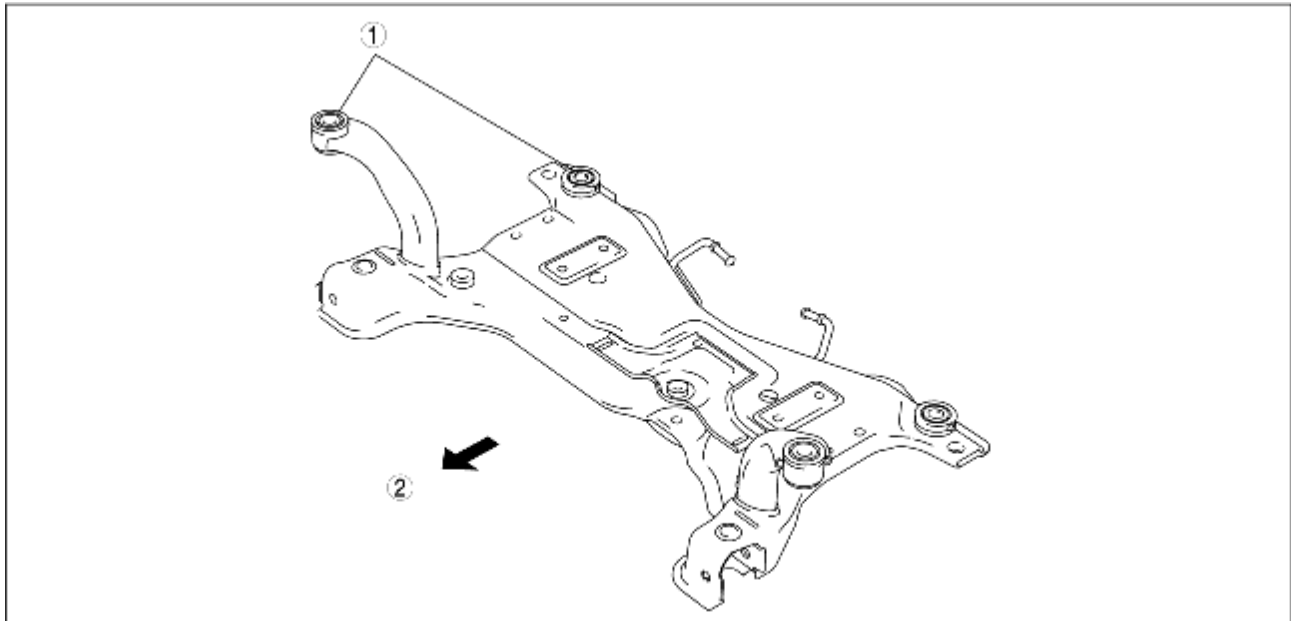

B3E0213T003

1	Rubber mount
2	Front of the vehicle