


DLC-2 CONSTRUCTION (ABS, DYNAMIC STABILITY CONTROL)

B3E040243000T06

- A connector (DLC-2) conforming to International Organization for Standardization (ISO) standards has been adopted.
- Shape and terminal arrangement as stipulated by the ISO 15031-3 (SAE J1962) international standard has been adopted for this connector. The connector has a 16-pin construction that includes the CAN_H (HS), CAN_L (HS), CAN_H (MS), CAN_L (MS), GND1, GND2 and B+ terminals.

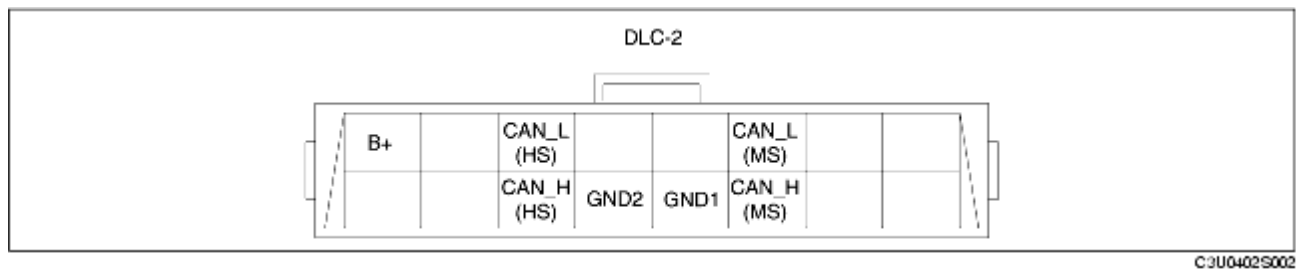

C3U0402S002

Terminal	Function
CAN_L (HS)	Serial communication Lo terminal (HS)
CAN_H (HS)	Serial communication Hi terminal (HS)
CAN_L (MS)	Serial communication Lo terminal (MS)
CAN_H (MS)	Serial communication Hi terminal (MS)
GND1	Body GND terminal
GND2	Serial communication GND terminal
B+	Battery power supply terminal