
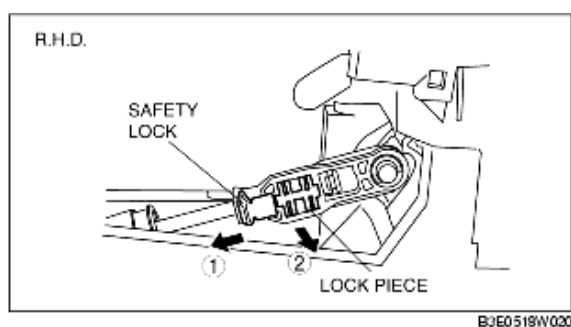




SELECTOR CABLE ADJUSTMENT

B3E051846102W03

1. Remove the console. (See [CONSOLE REMOVAL/INSTALLATION](#).)
2. Shift the selector lever to the P position.
3. Unlock the lock piece of the selector cable (selector lever side) in the order as shown in the figure.

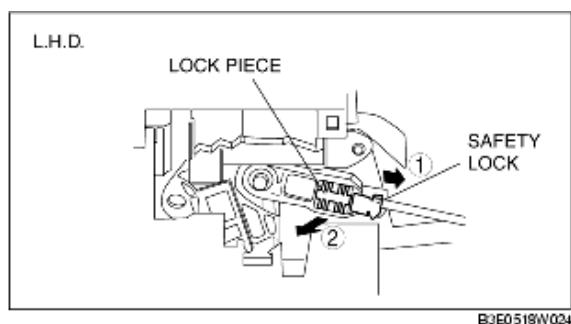

4. Verify that the manual shaft is in the P position.
5. Lock the lock piece and safety lock of the selector cable (selector lever side) in the order as shown in the figure.

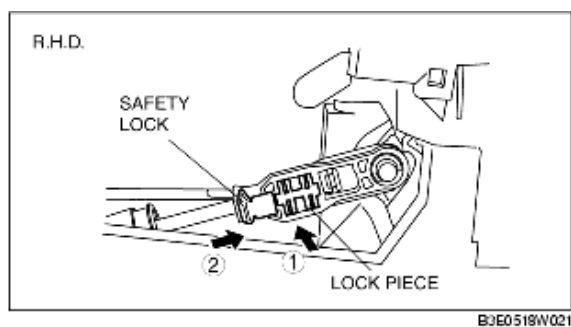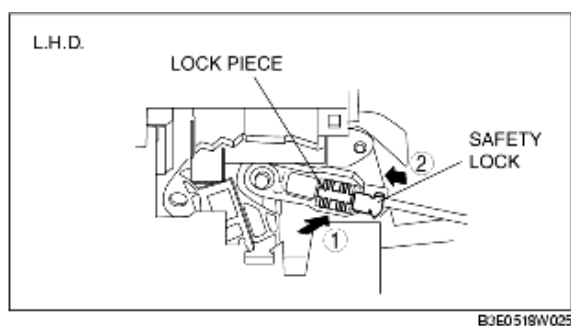

6. Install the console. (See [CONSOLE REMOVAL/INSTALLATION](#).)

7. Shift the selector lever from the P position to M range, and make sure that there are no other components in that area to interfere with the lever.