


CHILD-RESTRAINT SEAT ANCHOR REMOVAL/INSTALLATION

B3E081100117W01

4SD

1. Remove in the order indicated in the table.

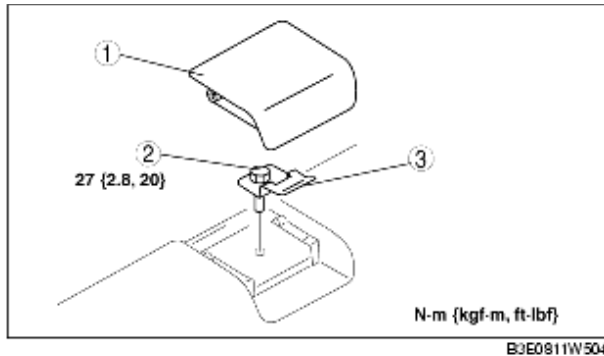


| | |
|---|-----------------------------|
| 1 | Cover |
| 2 | Bolt |
| 3 | Child-restraint seat anchor |

2. Install in the reverse order of removal.

5HB

1. Remove the trunk end trim. (See [TRUNK END TRIM REMOVAL/INSTALLATION](#).)

2. Remove in the order indicated in the table.

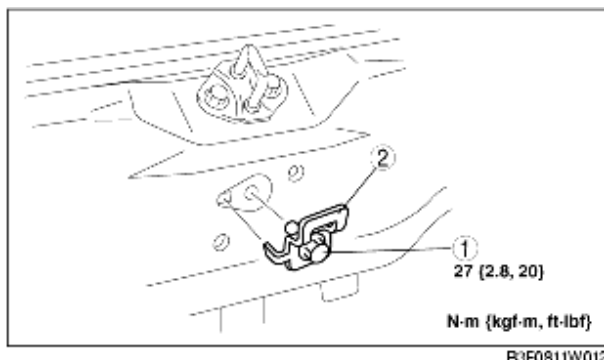

| | |
|---|-----------------------------|
| 1 | Bolt |
| 2 | Child-restraint seat anchor |

3. Install in the reverse order of removal.