


STARTING PROCEDURE FOR ON-BOARD DIAGNOSTIC TEST MODE

B3E090266900W01

Note

- All DTCs displayed in the on-board diagnostic test mode should be entered in the Audio Repair Order Form.

1. Turn the ignition switch to the ACC or ON position.
2. While pressing the POWER button, simultaneously press the AM button and the CLOCK button for **2 s or more**.

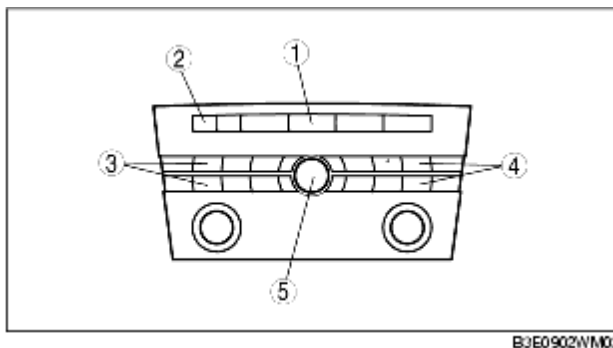

1	AM button
2	CLOCK button
3	SEEK button (without RDS)
4	SEEK button (with RDS)
5	POWER button

Note

- If several DTCs are in the memory, they can be displayed using the SEEK button.

3. To stop the on-board diagnostic test mode, turn the ignition switch to the LOCK position.