


MEMORY CLEARING PROCEDURE

B3E090266900W03

1. Start the on-board diagnostic test mode.
2. While pressing the POWER button, simultaneously press the AUDIO CONT button for **2 s or more**.

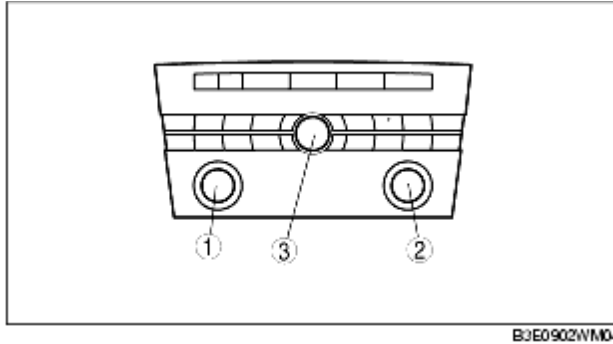

1	AUDIO CONT button (without RDS)
2	AUDIO CONT button (with RDS)
3	POWER button

Caution

- Before clearing the memory, be sure to enter all of the DTCs displayed in the on-board diagnostic test mode in the Audio Repair Order Form.

3. To stop the on-board diagnostic test mode, turn the ignition switch to the LOCK position.