



REAR DOOR QUARTER GLASS REMOVAL/INSTALLATION

B3E091259500W03

1. Disconnect the negative battery cable. (Vehicles with power window system)
2. Remove the rear beltline molding. (See [REAR BELTLINE MOLDING REMOVAL/INSTALLATION](#).)
3. Remove the regulator handle. (Vehicles with manual window system) (See [REGULATOR HANDLE REMOVAL](#).)
4. Remove the rear door trim. (See [REAR DOOR TRIM REMOVAL/INSTALLATION](#).)
5. Remove the bolts and screw.

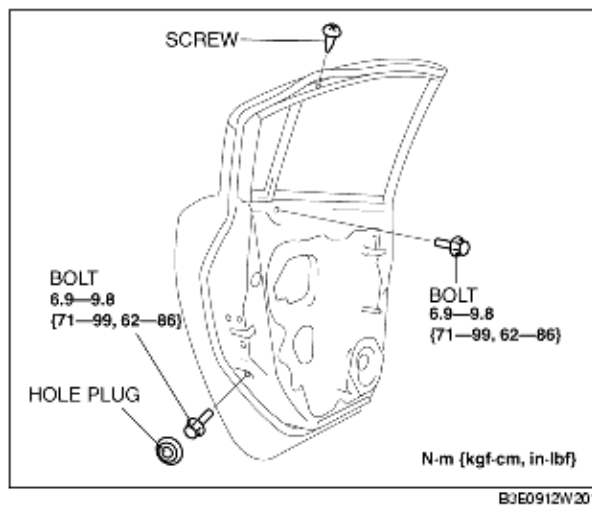

6. Remove the rear door glass guide and glass run channel as a single unit.

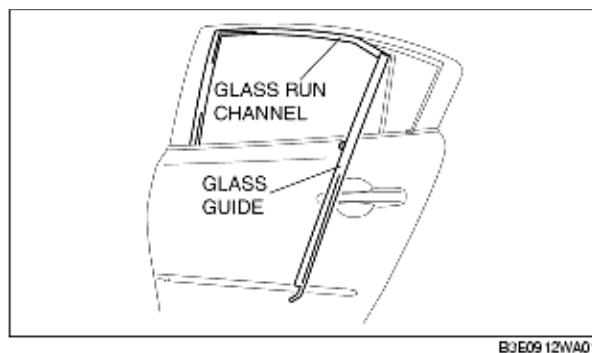

7. Remove the rear door quarter glass.

8. Install in the reverse order of removal.