


SEAT WARMER SWITCH REMOVAL/INSTALLATION

B3E091388110W01

1. Disconnect the negative battery cable.
2. Remove the ashtray panel. (See [CONSOLE REMOVAL/INSTALLATION](#).)
3. Disconnect the connector.

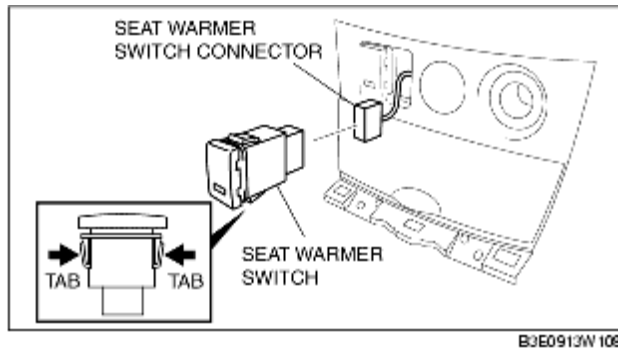

4. Squeeze the tabs of seat warmer switch and pull it outward to remove it.
5. Install in the reverse order of removal.