


THEFT-DETERRENT SIREN REMOVAL/INSTALLATION [5HB]

B3E091400173W01

1. Disconnect the negative battery cable.
2. Remove the following parts:
 - (1) Rear seat (See [REAR SEAT REMOVAL/INSTALLATION.](#))
 - (2) Rear scuff plate (See [REAR SCUFF PLATE REMOVAL/INSTALLATION.](#))
 - (3) Tire house trim (See [TIRE HOUSE TRIM REMOVAL/INSTALLATION.](#))
 - (4) Trunk end trim (See [TRUNK END TRIM REMOVAL/INSTALLATION.](#))
 - (5) Trunk side upper trim (See [TRUNK SIDE UPPER TRIM REMOVAL/INSTALLATION.](#))
 - (6) Cargo compartment light (See [CARGO COMPARTMENT LIGHT REMOVAL/INSTALLATION.](#))
3. Remove in the order indicated in the table.

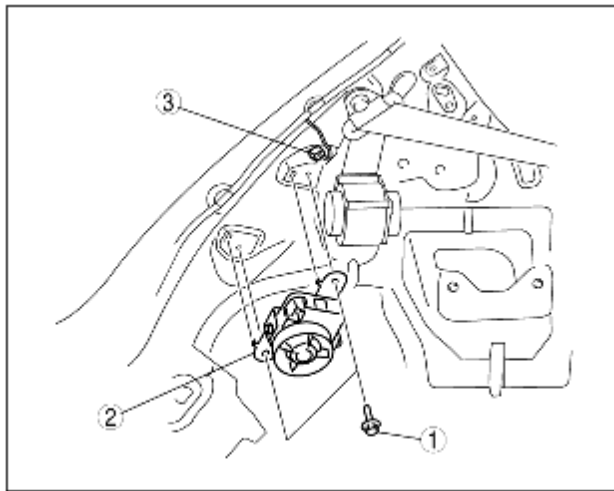

B3E0914 1005

1	Bolt
2	Theft-deterrent siren
3	Connector

4. Install in the reverse order of removal.