


THEFT-DETERRENT SIREN REMOVAL/INSTALLATION [4SD]

B3E091400173W02

1. Disconnect the negative battery cable.
2. Remove the following parts:
 - (1) Rear seat (See [REAR SEAT REMOVAL/INSTALLATION.](#))
 - (2) Rear scuff plate (See [REAR SCUFF PLATE REMOVAL/INSTALLATION.](#))
 - (3) Tire house trim (See [TIRE HOUSE TRIM REMOVAL/INSTALLATION.](#))
 - (4) Trunk end trim (See [TRUNK END TRIM REMOVAL/INSTALLATION.](#))
 - (5) Service hole cover (LH)
3. Remove in the order indicated in the table.

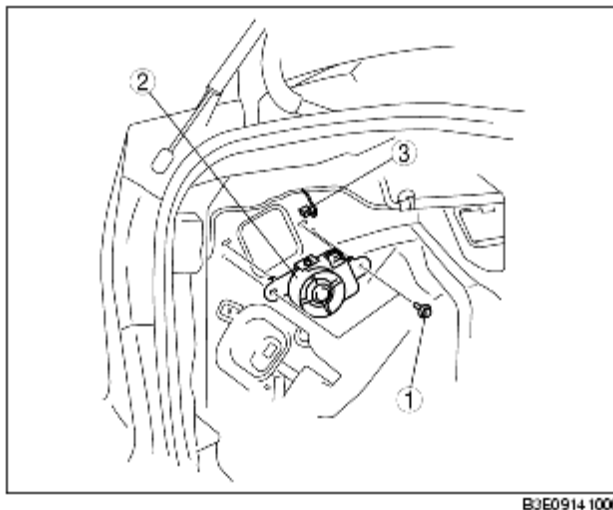

1	Bolt
2	Theft-deterrent siren
3	Connector

4. Install in the reverse order of removal.