


REAR DOOR GARNISH REMOVAL/INSTALLATION

B3E091650030W01

1. Remove the sail garnish. (See [SAIL GARNISH REMOVAL/INSTALLATION](#).)
2. Remove the screws.

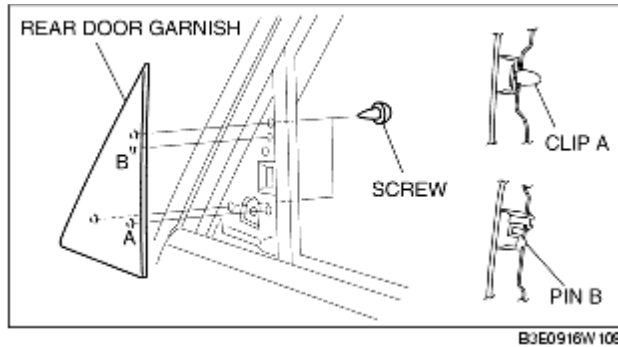

3. Disengage clip A from the body by squeezing it from inside of the vehicle, and remove the rear door garnish.
4. Install in the reverse order of removal.