


FRONT BELTLINE MOLDING REMOVAL/INSTALLATION

B3E091650641W01

1. Remove the inner garnish. (See [INNER GARNISH REMOVAL/INSTALLATION](#).)
2. Remove the power outer mirror installation screws and move the mirror to access the front end of the front beltline molding. (See [POWER OUTER MIRROR REMOVAL/INSTALLATION](#).)
3. Raise the center of the front beltline molding and detach tabs A.

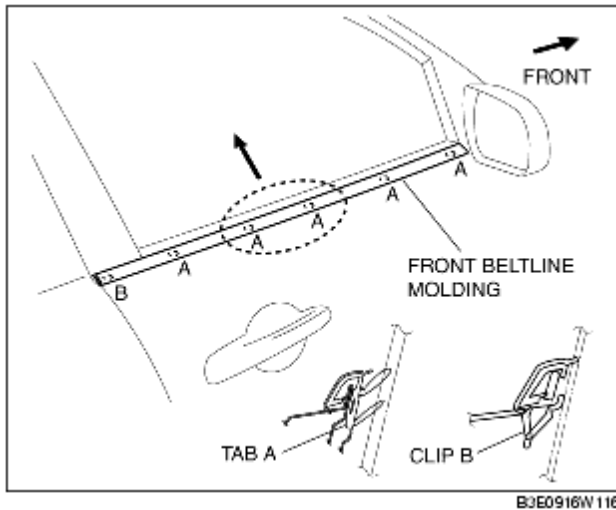

4. Using a small flathead screwdriver, detach clip B and remove the front beltline molding.
5. Install in the reverse order of removal.