


REAR BELTLINE MOLDING REMOVAL/INSTALLATION

B3E091650641W02

1. Remove the sail garnish. (See [SAIL GARNISH REMOVAL/INSTALLATION](#).)
2. Remove the rear door garnish. (See [REAR DOOR GARNISH REMOVAL/INSTALLATION](#).)
3. Raise the center of the rear beltline molding and detach tabs A.

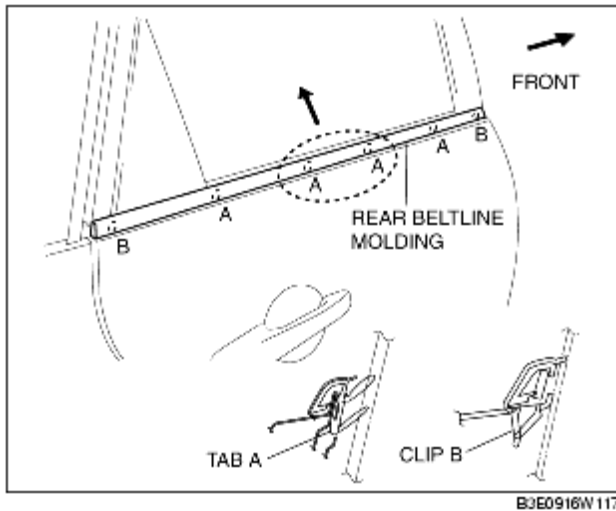

4. Using a small flathead screwdriver, detach clip B and remove the rear beltline molding.
5. Install in the reverse order of removal.