

SIDE PROTECTOR REMOVAL

B3E091650680W01


1. Pry the side protector end **20-30 mm {0.8-1.1 in}** using a flathead screwdriver or a razor.

Warning

- Using a razor with bare hands can cause injury. Always wear gloves when using a razor.

Note

- The side protector is installed with double-sided adhesive tape. If the side protector is difficult to remove, warm the double-sided adhesive tape using a hot air blower.

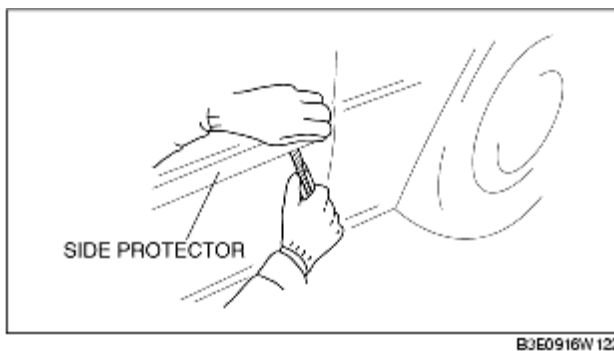

2. Pull the side protector outward, then remove it from the body.