


SIDE STEP MOLDING REMOVAL/INSTALLATION

B3E091651100W01

1. Remove the fasteners.

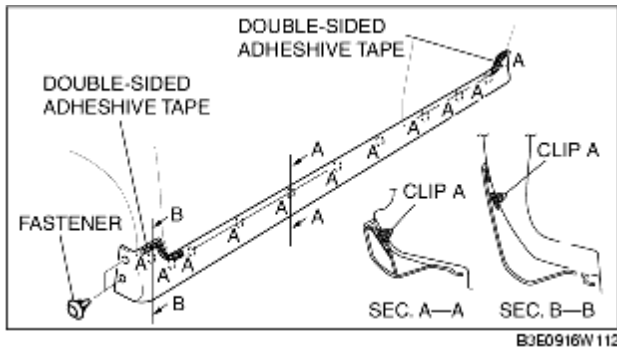


2. While cutting the double-sided adhesive tape using a flathead screwdriver or a razor, separate the side step molding from the body.

Warning

- Using a razor with bare hands can cause injury. Always wear gloves when using a razor.

3. Pull the side step molding outward, then disengage clips A from the body.
4. Slide the side step molding towards the front of the vehicle and remove clips B from the side step molding.

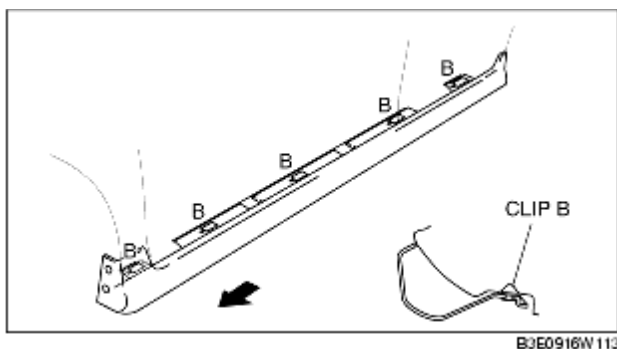

5. Remove the side step molding.
6. Install in the reverse order of removal.

- (1) Attach double-sided adhesive tape to the side step molding as shown in the figure.

