


GLOVE COMPARTMENT REMOVAL/INSTALLATION

B3E091764260W01

1. Remove the front scuff plate. (Passenger's side) (See [FRONT SCUFF PLATE REMOVAL/INSTALLATION.](#))
2. Remove the front side trim. (Passenger's side) (See [FRONT SIDE TRIM REMOVAL/INSTALLATION.](#))
3. Remove the decoration panel. (See [DECORATION PANEL REMOVAL/INSTALLATION.](#))
4. Remove the screws.

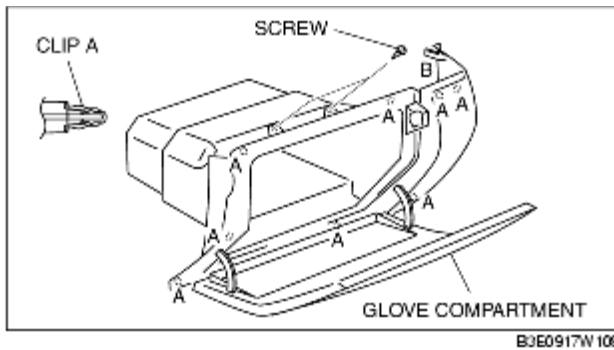

5. Pull the glove compartment outward and detach clips A and tab B.
6. Remove the glove compartment.
7. Install in the reverse order of removal.