


INNER GARNISH REMOVAL/INSTALLATION

B3E091768530W01

1. Disconnect the negative battery cable.
2. Pull the inner garnish outward and detach clip A.

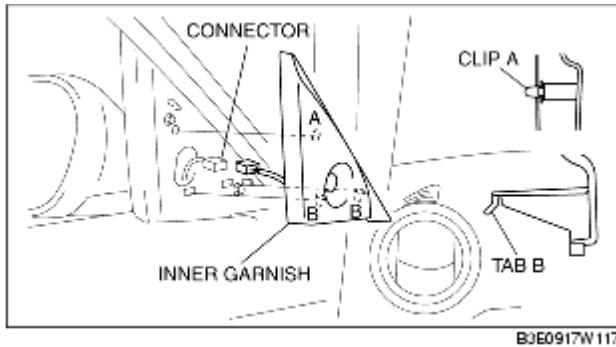

3. Disconnect the connector.
4. Detach the tabs B and remove the inner garnish.
5. Install in the reverse order of removal.