


GLOVE COMPARTMENT LIGHT BULB REMOVAL/INSTALLATION

B3E091851445W01

1. Disconnect the negative battery cable.
2. Remove the following parts:
 - (1) Front scuff plate (Passenger's side) (See [FRONT SCUFF PLATE REMOVAL/INSTALLATION.](#))
 - (2) Front side trim (Passenger's side) (See [FRONT SIDE TRIM REMOVAL/INSTALLATION.](#))
 - (3) Decoration panel (See [DECORATION PANEL REMOVAL/INSTALLATION.](#))
 - (4) Glove compartment (See [GLOVE COMPARTMENT REMOVAL/INSTALLATION.](#))
3. Remove the socket, then remove the glove compartment light bulb.

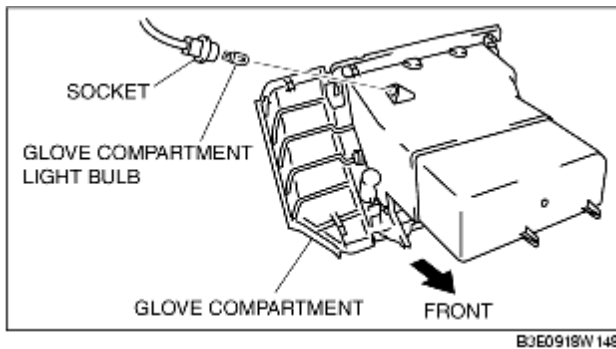

4. Install in the reverse order of removal.