


# FRONT DOOR SPEAKER REMOVAL/INSTALLATION

B3E092066961W01

1. Disconnect the negative battery cable.
2. Remove the front door trim.(See [FRONT DOOR TRIM REMOVAL/INSTALLATION.](#))
3. Remove in the order indicated in the table.

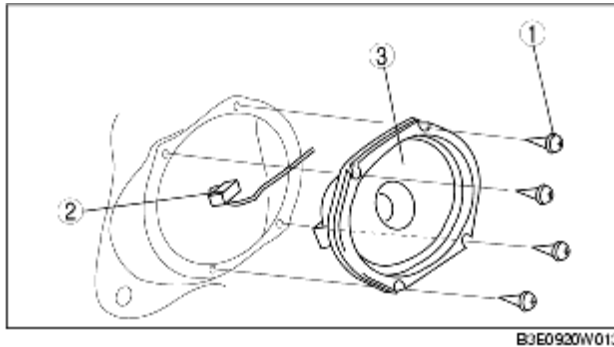


1	Screw
2	Connector
3	Front door speaker (See <a href="#">Front Door Speaker Installation Note.</a> )

4. Install in the reverse order of removal.

## Front Door Speaker Installation Note

1. Remove the speaker with the wiring harness passing through the groove of the front door module.

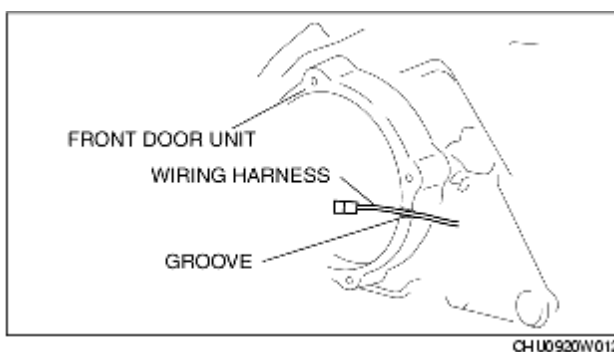

### Caution

- If the speaker is installed with the wiring harness out of the groove, an open circuit in the wiring harness could occur.