


REAR DOOR SPEAKER REMOVAL/INSTALLATION

B3E092066961W03

1. Disconnect the negative battery cable.
2. Remove the rear door trim.(See [REAR DOOR TRIM REMOVAL/INSTALLATION](#).)
3. Remove in the order indicated in the table.

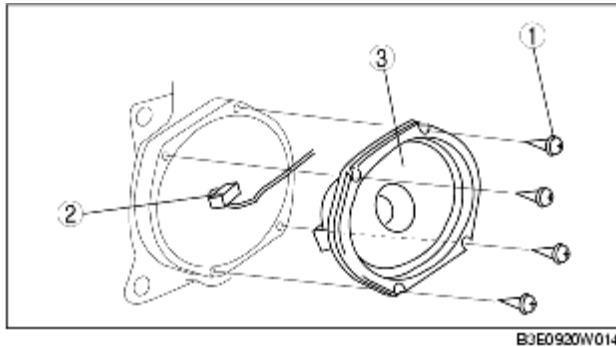


1	Screw
2	Connector
3	Rear door speaker (See Rear Door Speaker Installation Note .)

4. Install in the reverse order of removal.

Rear Door Speaker Installation Note

1. Remove the speaker with the wiring harness passing through the groove of the rear door module.

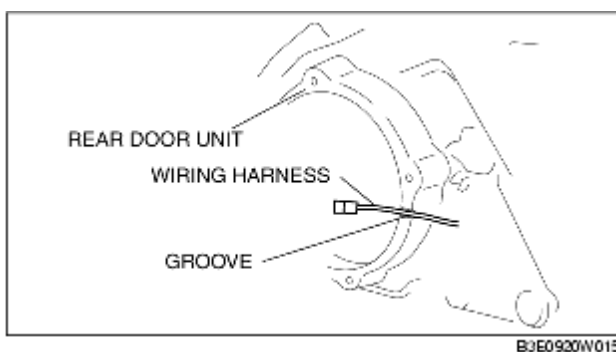

Caution

- If the speaker is installed with the wiring harness out of the groove, an open circuit in the wiring harness could occur.