


# FRONT TWEETER REMOVAL/INSTALLATION

---

B3E092066961W05

1. Disconnect the negative battery cable.
2. Remove the inner garnish from the front door. (See [INNER GARNISH REMOVAL/INSTALLATION](#).)
3. Remove the front tweeter.

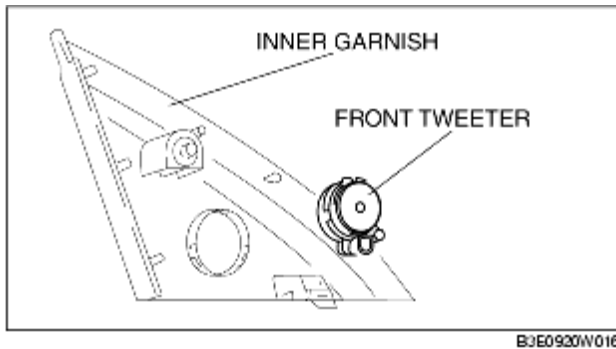

4. Install in the reverse order of removal.