


# REPAIRABLE RANGE OF POLYPROPYLENE BUMPERS

B3E098050000B02


The three types of damaged bumpers shown below are considered repairable. Although a bumper which has been damaged greater than this could also be repaired, it should be replaced with a new one because such repair would detract from the looks and quality of the bumper. In addition, such repair is not considered reasonable in terms of work time.

## Repairable Bumpers

1. A bumper with a hole less than 50 mm {1.97 in} in diameter.

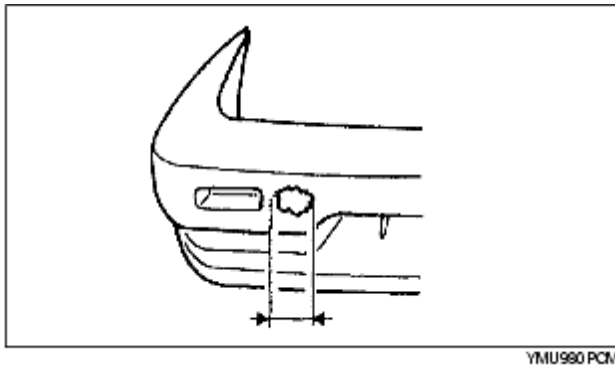

2. A bumper with a crack less than 100 mm {3.94 in} in length.

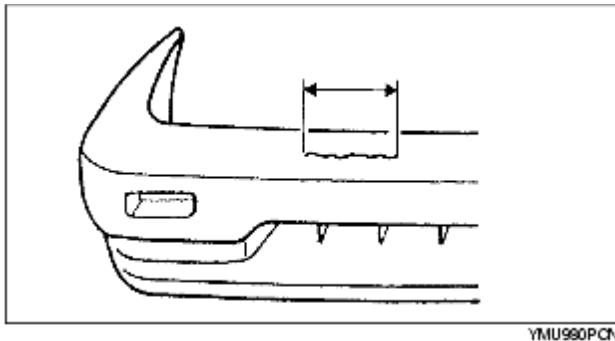

3. A bumper with a crack less than 100 mm {3.94 in} in length that is less than half of the width of the bumper.

