

REAR FLOOR PAN REMOVAL


B3E098053750B01

1. Rough cut area (A).


Caution

- When rough cutting area (A), cut 20mm {0.79 in} away from the flange (towards rear) at the rear of the lower anchor.

2. Remove the rear floor pan.

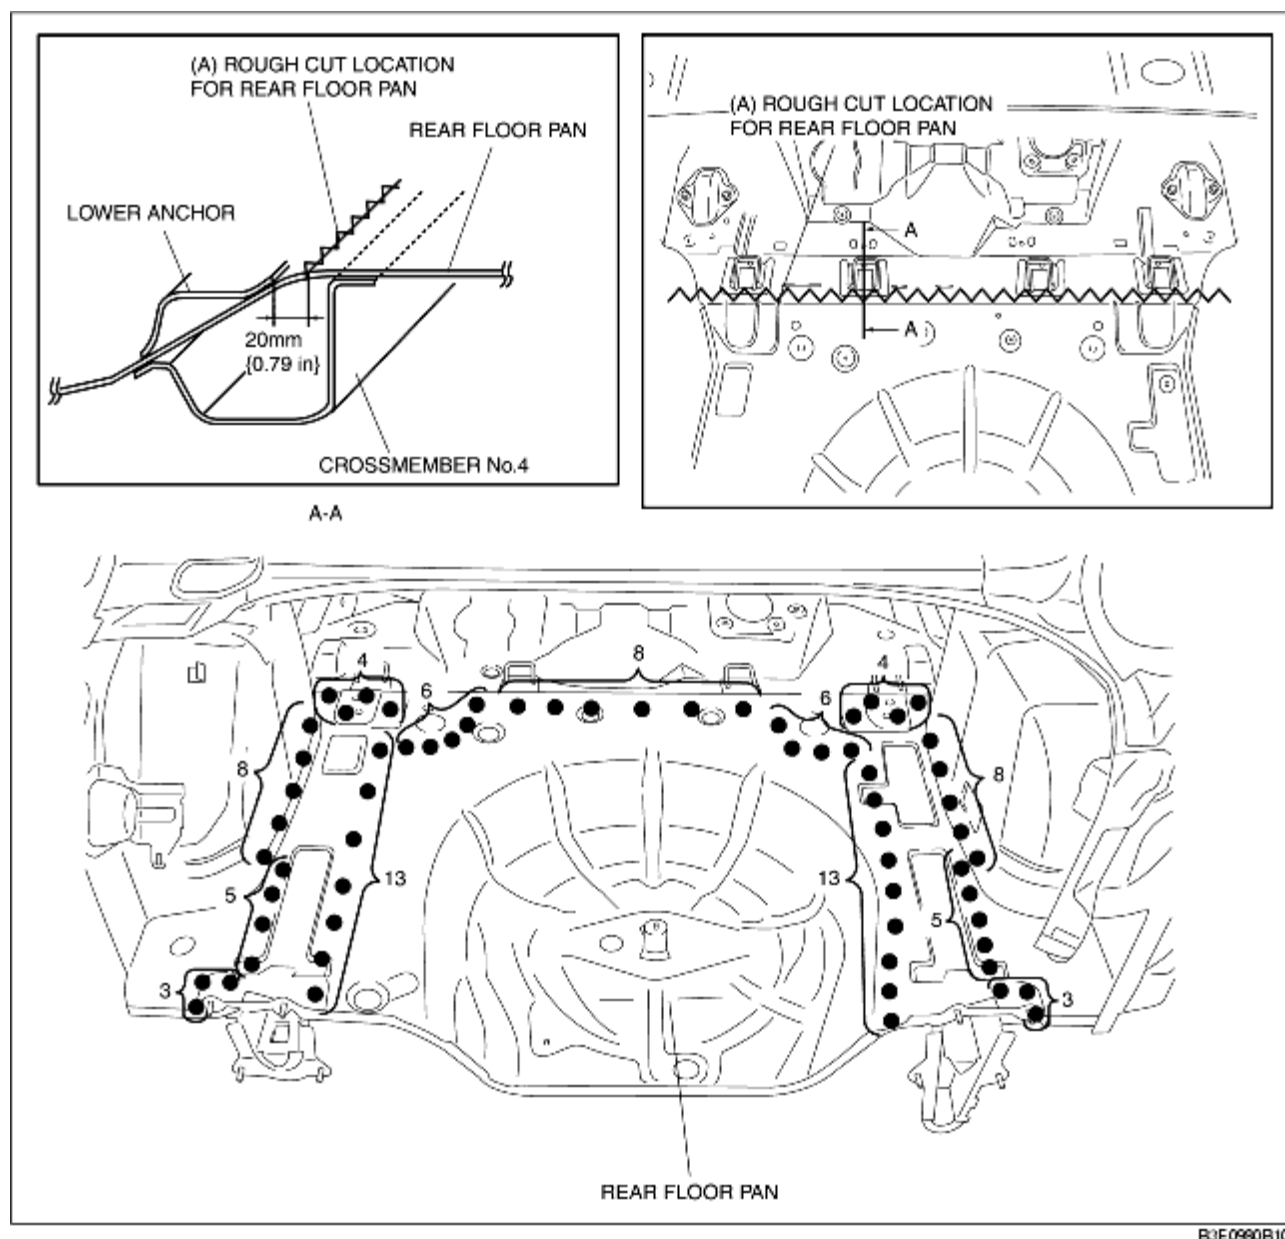

B3E0980B102

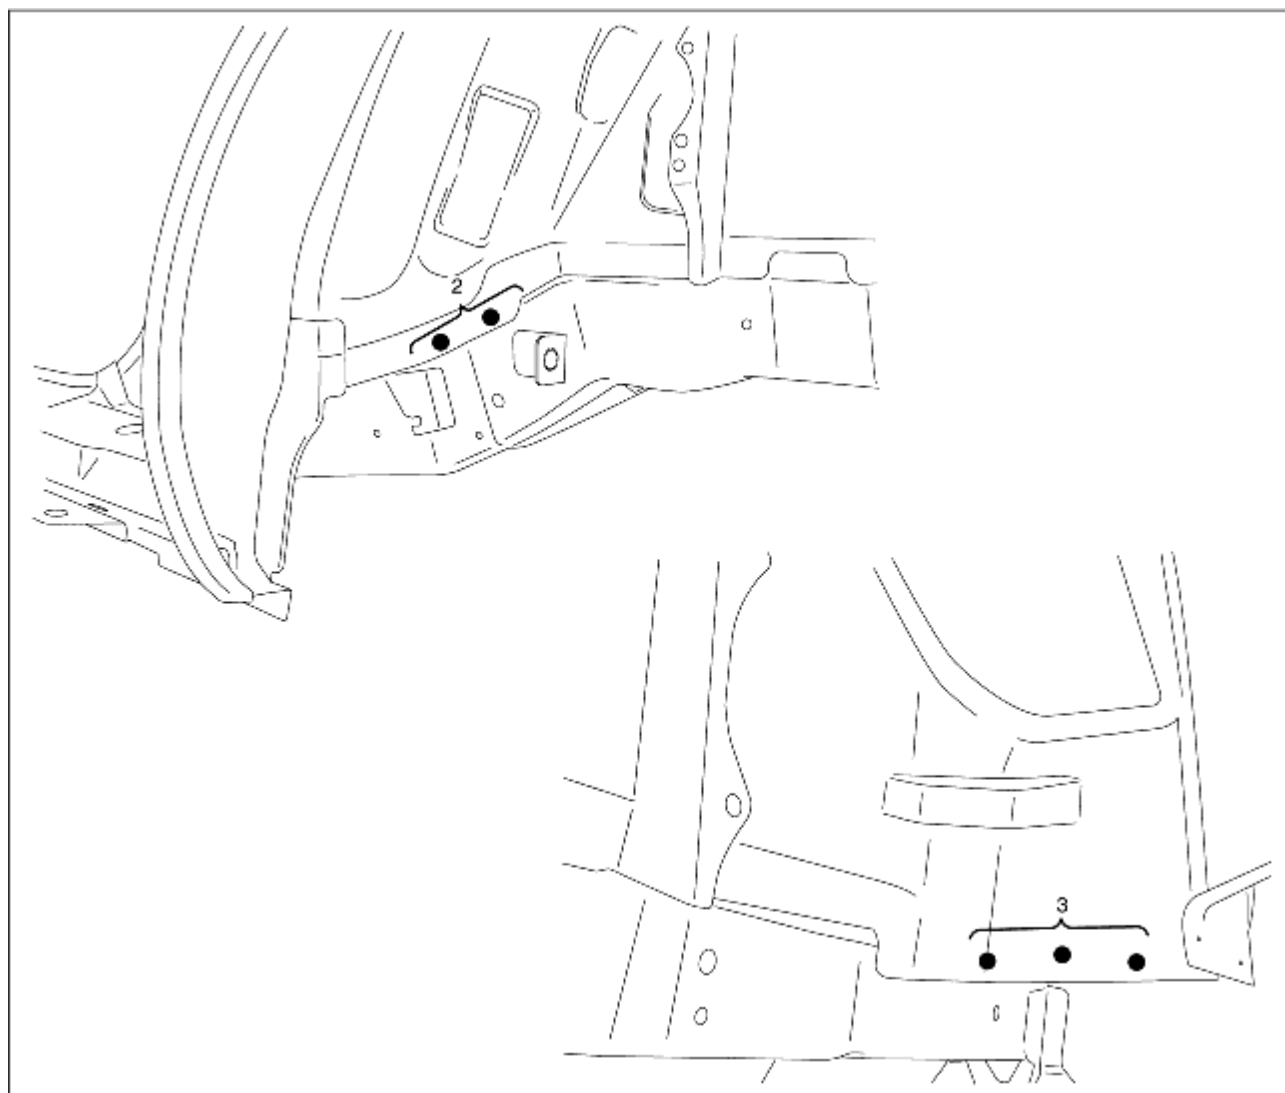

B3E0980B103