


REAR SIDE FRAME (PARTIAL CUTTING) INSTALLATION

B3E098053810B02

1. Cut the new and existing parts at the cut-and-join location, and bevel the parts.
2. To cut-and-join the new part, cut at the locations indicated in the figure below and bevel the cut-and-join locations of the new parts.
3. When installing the new parts, trial-fit new and existing parts, and then measure and adjust the body to conform with standard dimensions.
4. After temporarily installing new parts, make sure the related parts fit properly.

Caution

- The cut-and-join area indicates the maximum size range of the installation position.

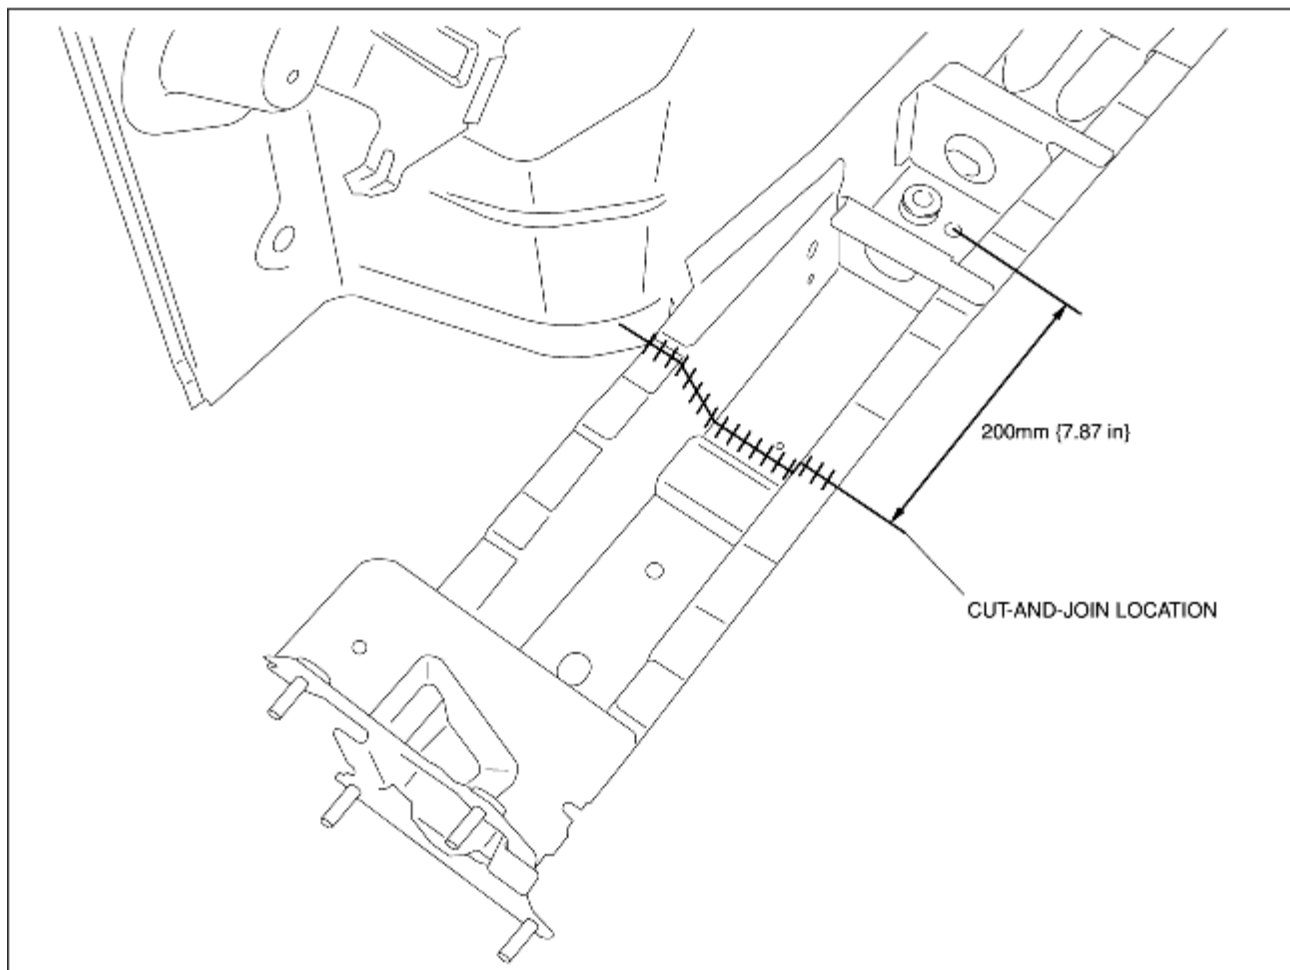

B3E0980B108