

REAR FENDER RAIN RAIL AND CORNER PLATE INSTALLATION


B3E098070440B02

4SD

1. When installing new parts, measure and adjust the body as necessary to conform with standard dimensions.
2. Drill holes for plug welds before installing new parts.
3. After temporarily installing new parts, make sure the related parts fit properly.

Note

- When replacing the rear fender rain rail and corner plate separately, weld the 3 locations indicated by (A).

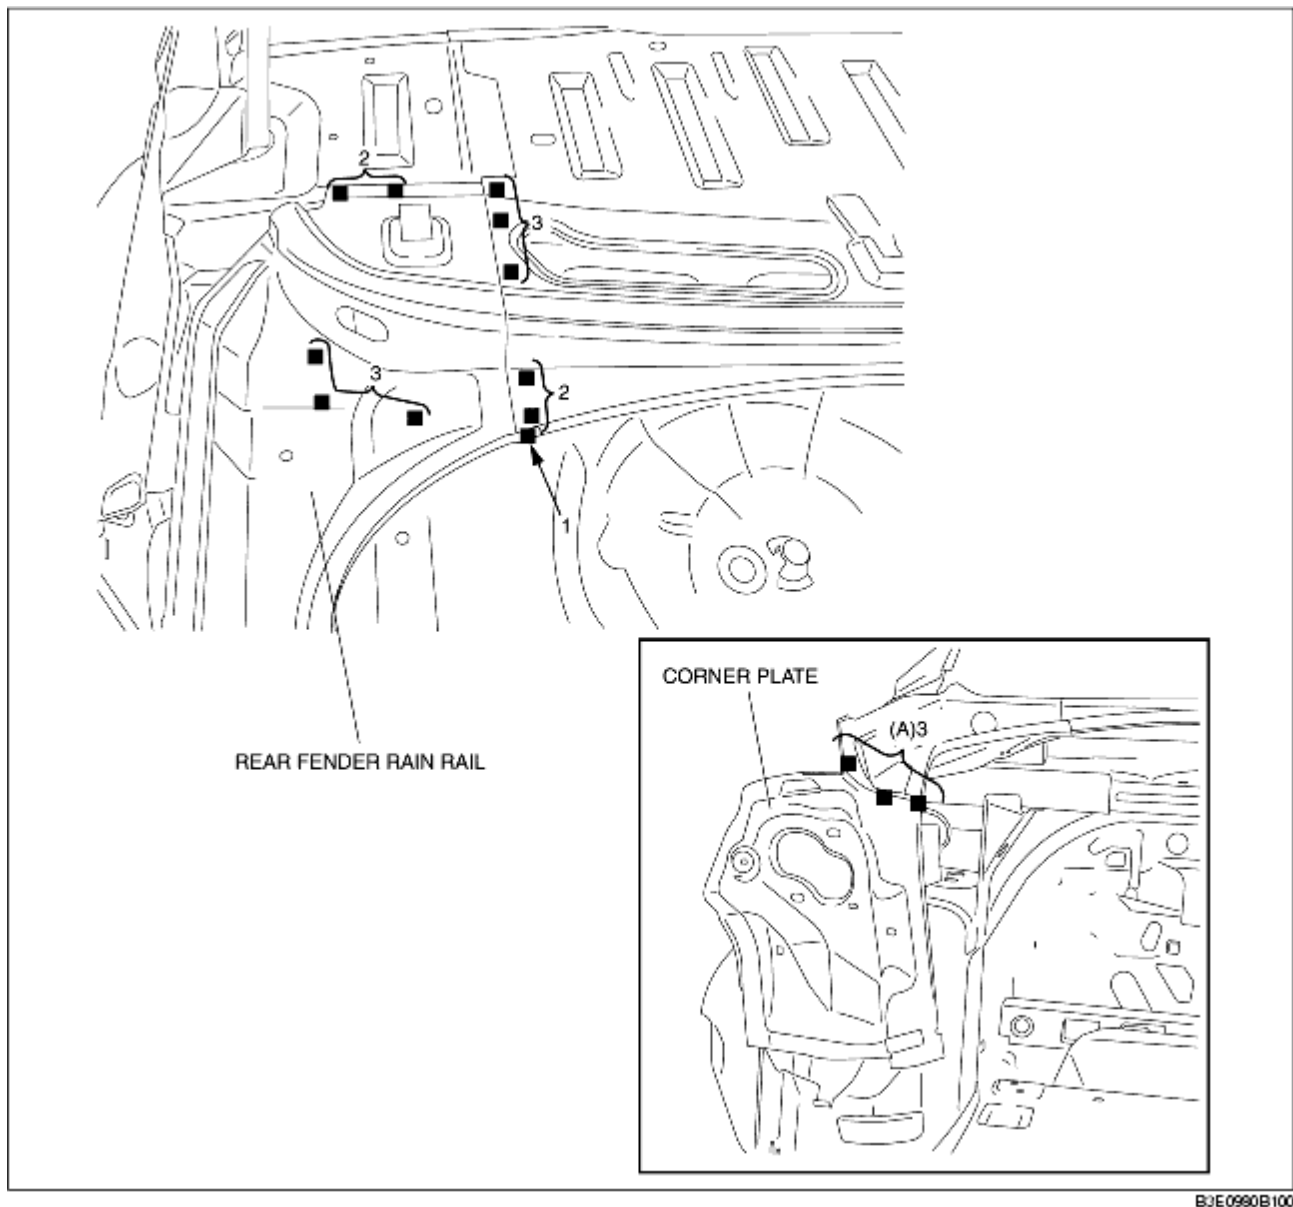

5HB

1. When installing new parts, measure and adjust the body as necessary to conform with standard dimensions.
2. Drill holes for plug welds before installing new parts.
3. After temporarily installing new parts, make sure the related parts fit properly.

Note

- When replacing the rear fender rain rail and corner plate separately, weld the 8 locations indicated by (A).

