

JACKING POSITIONS, VEHICLE LIFT (2 SUPPORTS) AND SAFETY STAND (RIGID RACK) POSITIONS

B3E00000007W01

Jacking Positions


Warning

- Improperly jacking a vehicle is dangerous. The vehicle can slip off the jack and cause serious injury. Use only the correct front and rear jacking points and block the wheels.
- Use safety stands to support the vehicle after it has been lifted.

Front


Note

- Before setting the jack under the vehicle, place boards (approx. 20 mm {0.78 in} thick) under the front tires so that the bumper does not interfere with the jack.

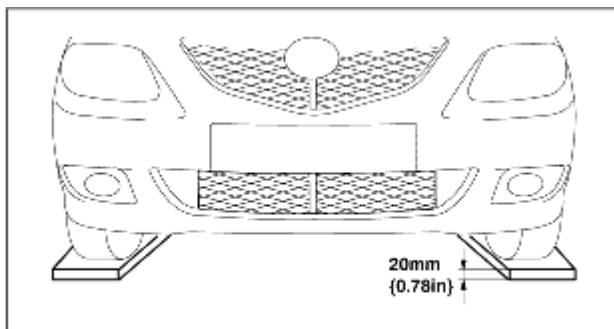

B3E0000W012

- At the center of the front crossmember.

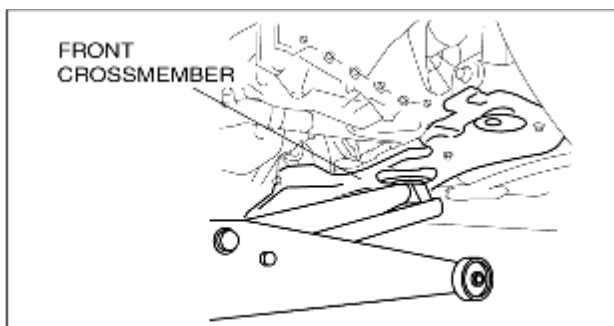


B3E0000W010

Rear

Caution

- Place a board (approx. 20 mm {0.78 in} thick) between the rear crossmember and the jack to prevent damage to the crossmember.

- At the center of the rear crossmember.

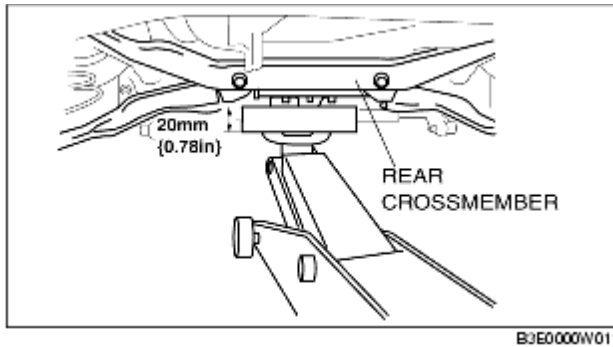


Vehicle Lift Positions

Front and rear

Warning

- Unstably lifting a vehicle is dangerous. The vehicle can slip off the lift and cause serious injury and/or vehicle damage. Make sure that the vehicle is on the lift horizontally by adjusting the height of support at the end of the arm of the lift.

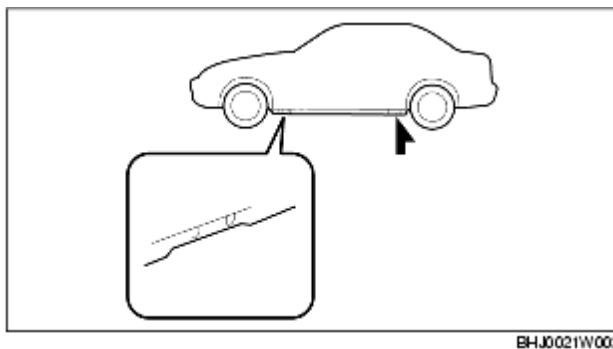

Safety Stand Positions

Front and rear

- Both sides of the vehicle, on side sills.

